Nova

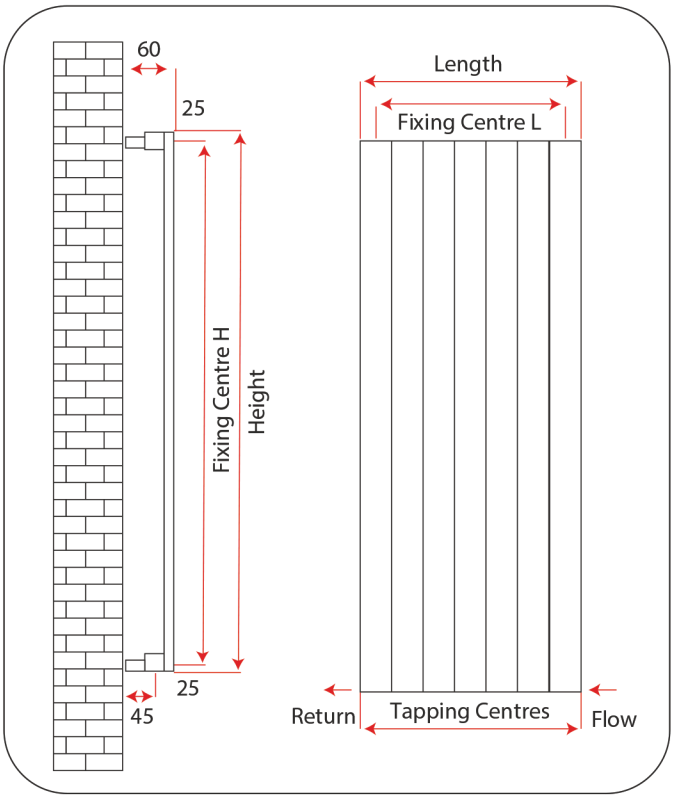

- All the dimensions are shown in millimetres
- Tube dia 60mm x 20mm
- Header tube dia 30mm x 30mm
- Bracket length – 50mm
- ½ inch BSP bottom opposite end connections
- Test pressure: 10 Bar
- Max working temperature: 8 Bar
- Heat output – in accordance with EN 442

Please Note:
- Please allow minimum of 100mm for valves
- Summer Element use will affect pipe centres
- Not suitable for use on domestic hot water system
- [illegible]

Nova	Water Content (L)	Weight (KG)	pipe Centres +/- 2mm	Fixing Centres (H) +/- 2mm	Fixing Centres (L) +/- 2mm	Height (mm)	Length (mm)
RXNO-1500420	5.2	17.6	485*	1450	360	1500	420
RXNO-1800420	6.2	20.9	485*	1750	360	1800	420

*Will vary depending on size of valves

Installation:

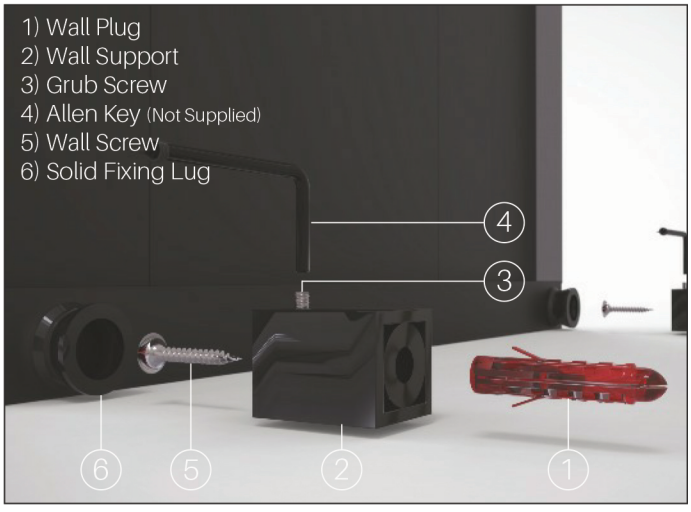

Step 1: Select the desired mounting position, ensuring the [illegible] must be securely attached to a stud or masonry.

Step 2: Loosely screw the wall support (Part 2) into the wall using the wall screw (5) and washer. Use wall plug (1) if you are [illegible]

Step 3: Manoeuvre the rail back onto the bracket and tighten with the grub screw (3).

Cleaning:
- Do not use any abrasive or chemical cleaners to clean the [illegible] use warm water and a damp cloth.
- Do not clean when hot.

Radox Radiators LTD, Radox House, Midlands Industrial Estate, Holt, Trowbridge, Wiltshire, BA14 6RU
01225 782 819 info@radoxraditors.com www.radoxradiators.com