



CHROME



WHITE

ELECTRICAL ELEMENT WALL CONTROLLER - IMPORTANT INFORMATION (PLEASE READ)


- Please read the instructions thoroughly before attempting to fit the product or attach it to your electrical system.
- Please ensure that you choose a suitably sized electrical element for your towel warmer.
- The controller will only work with standard construction towel warmers and not PTC type elements.

Safety Precautions: This product should be fitted by a competent person who can ensure compliance with IEE, Part P and local authority regulations. Ensure the mains electrical circuit and the fused spur unit are both isolated before fitting. This unit should not be fitted in IEE bathroom zone 1.

WIRING INSTRUCTIONS

A fused spur is required in the supply circuit to the controller, fitted with the correct size fuse. The 2 x E & 2 x N terminals are linked on the printed circuit board.

ELECTRICAL ELEMENT WIRE (OUT)

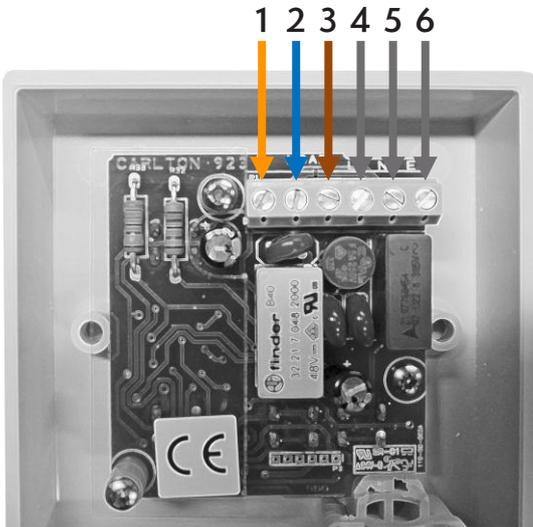

From left to right terminals 1-3 correspond to the element cable.

The element wires should be connected as follows:


Green/Yellow Earth to terminal 1 (E on board)

Blue Neutral to terminal 2 (L on board)

Brown Live to terminal 3 (D/T on board)

VERY IMPORTANT - This unit must be earthed

ELECTRICAL ELEMENT WIRE (IN)

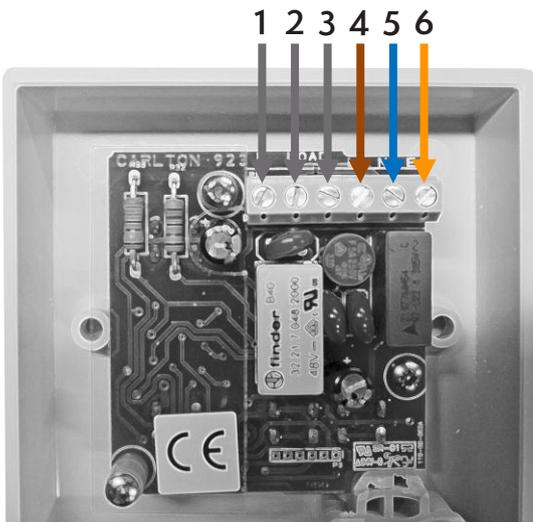

From left to right terminals 4-6 correspond to the mains cable wires.


The mains cable wires should be connected as follows:

Green/Yellow Earth to terminal 4 (L on board)

Blue Neutral to terminal 5 (N on board)

Brown Live to terminal 6 (E on board)

VERY IMPORTANT - This unit must be earthed

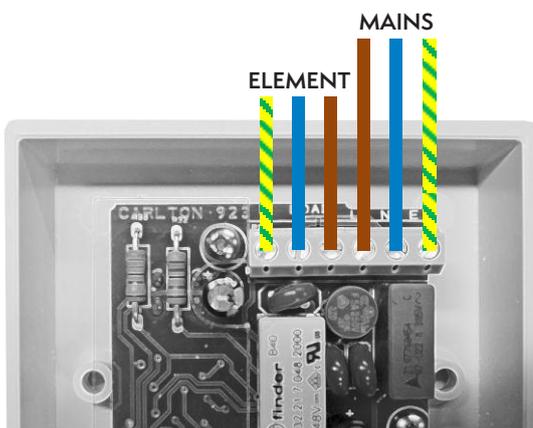

Clamp the element cable to the bottom of the wall controller

Carefully fit the control plate into the back box ensuring that no wires are trapped during the sitting process. Use the two fixing screws to secure to the back box.

OPERATING INSTRUCTIONS

There are four buttons on the control plate:

- (1) ON/OFF
- (2) Temperature Increase
- (3) Temperature Decrease
- (4) ECO Boost



BASIC OPERATION

The unit in standby has the main LED in **BLUE**. To turn the unit on in normal mode, press the ON/OFF button and release it. The LED will turn **RED**, the **ORANGE** LED bank will light between one to five LEDs.

To increase or decrease the temperature press the increase/decrease buttons to attain the desired setting. Each one of the orange LEDs represents the following power output from the element:

- 5 LEDs = 100% power
- 4 LEDs = 85% power
- 3 LEDs = 70% power
- 2 LEDs = 55% power
- 1 LED = 40% power

To turn the unit OFF, press the ON/OFF button and release it. NB The control plate contains a memory and whatever the temperature that was set when the unit was turned OFF, will be the temperature (number of LEDs lit) that the element will resume at when the unit is turned ON next time.

ECO FUNCTION

Press the ECO button from either power on or from standard control, the power LED will turn **GREEN**. The ECO function allows you to go to a higher power setting for 30 minutes (to heat the towel warmer) this power level can be set in the first 30 minutes. After 30 minutes the power is reduced to the pre-set lower level for 90 minutes. The power output can be set using the increase/decrease buttons to set your preferred rail temperature. **After 2 hours the controller will turn off.**

Both the 30 minute and the 90 minutes settings are saved in the controller.

Technical Data

Ingress protection: IPX4
Voltage: 230-245 vac
Maximum power output: 800w
Dimensions: 85 x 85 x 20mm
Approvals: CE, tested to EN55014-1:2006